

For Emergency Override



Gated communities, apartment complexes, parking garages, pedestrian gates and industrial receiving areas are just a few applications of the Knox® electric override key switch. It can be ordered with single or dual key options for fire, EMS and law enforcement access.

Features and Benefits

- Single or dual key switch
- Fire, EMS or law enforcement identification labels
- One position, two position or momentary switch
- Face plate and lock cover ensure weather resistant operation.

Electrical Data


- SWITCH: SPDT or DPDT
- 7 A resistive, 4 A inductive, (sea level), 28 VDC.
- 7 A resistive, 2.5 A inductive, (50,000 ft.), 28 VDC.
- 7 A resistive or inductive, 115 VAC., 60 Hz.
- UL® and CSA listed: 7 A, 250 VAC.
- Temperature tolerance up to +180° F.

Knox® Rapid Entry System


The Knox Company manufactures a complete line of high security products including Knox-Box key boxes, key vaults, cabinets, key switches, padlocks, locking FDC caps, plugs and electronic master key security systems. For more information or technical assistance, please call Customer Service at 1-800-552-5669.



Single Switch Model 3502

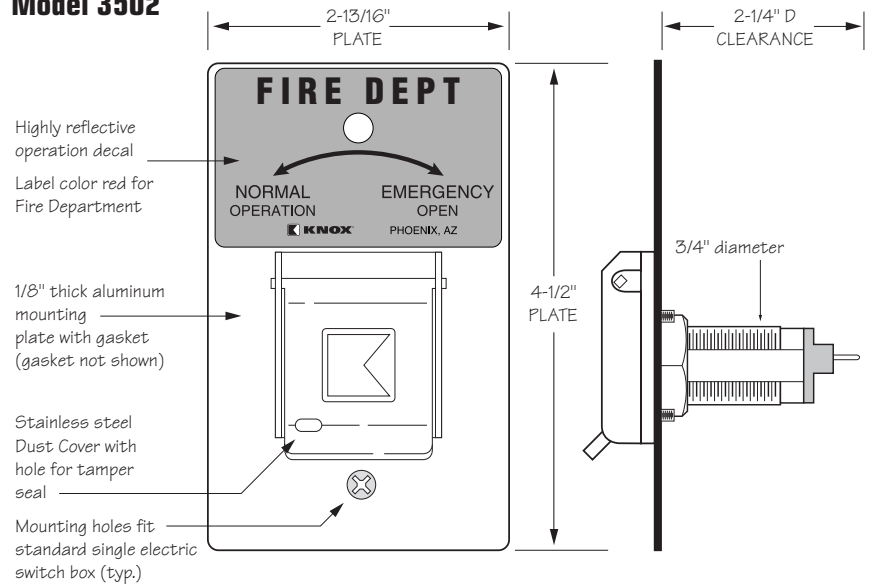

Dual Switch Model 3503

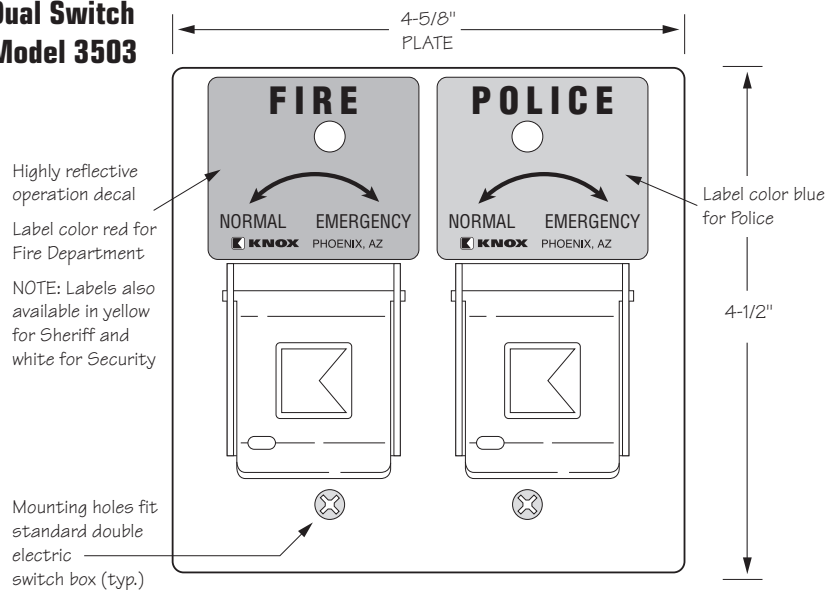

Ordering Specifications

Dimensions: Requires 2 1/4" recessed depth x 3/4" diameter
 Switch: SPDT or DPDT; 7A resistive, 4A inductive., key removable two position.
 Mounting: Key switch is designed to be recess mounted.
 P/N: 3500 Series Knox Key Switch (mfr's cat. ID)
 Mfr's Name: KNOX COMPANY